

Continuous

**DRYSTAR<sup>®</sup> SDA**

With built-in classifier

**SIGMA DRY<sup>®</sup> SGD**

Unique dry bead mill from the specialist,  
in fine-particle technologies,  
**Ashizawa**



**DRYSTAR<sup>®</sup>  
SDA5**



**SIGMA DRY<sup>®</sup>  
SGD12.5**

Particle technology for co-creation of new possibilities

## Grinding of high-hardness materials down to single-micron level!


Superb energy efficiency and support for mass production



**Feature**


- Dry and continuous-operation horizontal mill
- Grinding of several hundred-micron materials down to single-micron with single pass
- Minimizing of energy costs (one-tenth of jet mill \*according to in-house research)
- Minimal air consumption due to only using air for shaft seal protecting
- Effective surface modification processing

**Structure**

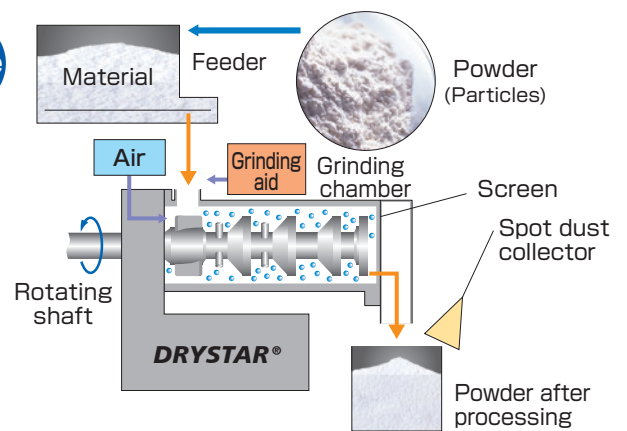


### Grinding data from DRYSTAR<sup>®</sup>

Processing example 1 Material: silica (Mohs hardness of 7)

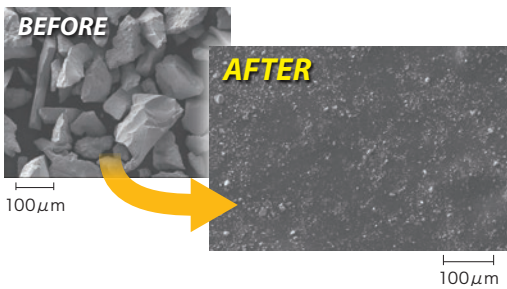


(Unit: µm)

	After single pass of processing	Before grinding
dMAX	15	520
d50	2.5	140

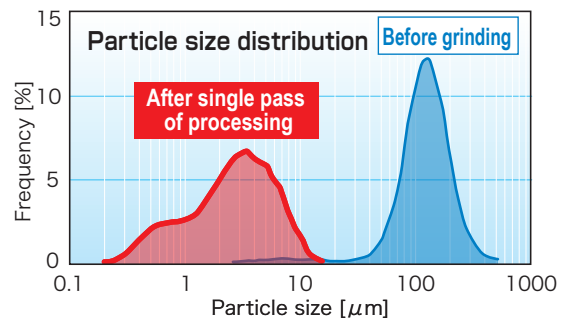


Processing example 2 Material: alumina (Mohs hardness of 9)

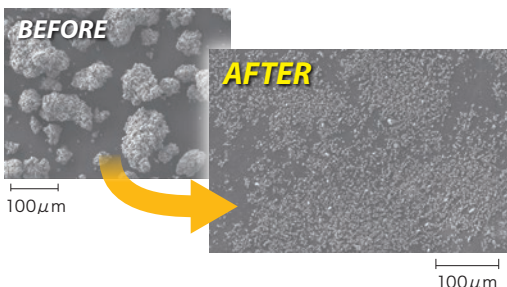

(Unit: µm)

	After single pass of processing	Before grinding
dMAX	9	200
d50	2.1	52

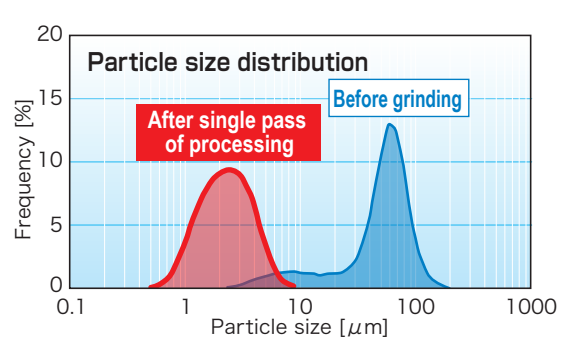

### Proven materials used with DRYSTAR<sup>®</sup>

Mohs hardness	Materials
7 to 9	Quartz, Silica, Soft ferrites, Hard ferrites, Alumina, Silicon nitride, Iron oxide, Tungsten oxide, Sodium silicate
4 to 6	Glass, Carbon, Black silica, Blast furnace ash, Fly ash, Incineration ash, Organic germanium, Zinc oxide, Cerium oxide, Chromium oxide
Less than 4	Gypsum, Magnesium hydroxide, Aluminum hydroxide, Barium titanate, PZT, Powdered green tea, Rice flour, Activated carbon, Calcium carbonate

## Achievement of high-level particle-size control! Support for combination of grinding, dispersing, and classifying




**Feature**

- Strong with grinding special pin shape
- Efficient collection of fine particles based on loosening of particles agglomerated in dispersing zone
- Elimination of coarse particles based on adoption of high-precision classifier
- Achievement of sharp particle-size distribution
- Minimization of installation space


### Specifications

### Grinding data from SIGMA DRY<sup>®</sup>

<Differences in particle-size distribution resulting from adjusting of SGD12.5 classifier rotation speed and blower air volume>

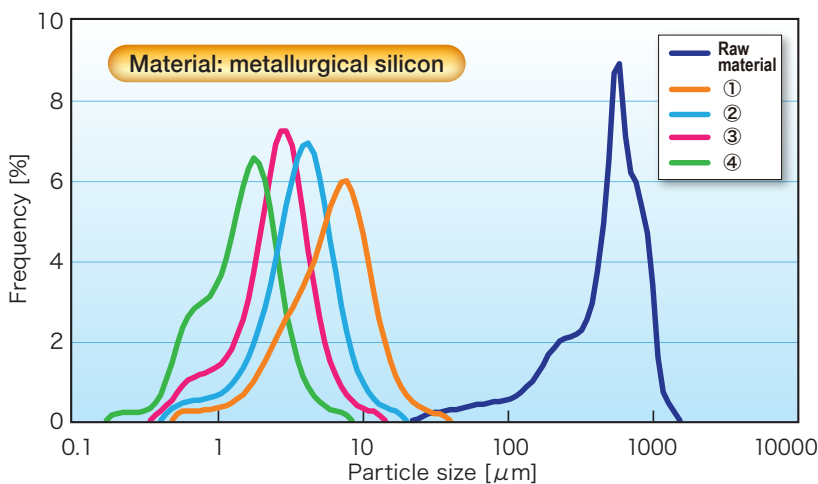


	Operating conditions		Particle size (μm)	
	Classifier rotation speed (rpm)	Air flow (m <sup>3</sup> /min)	d50	dMAX
Raw material	—	—	516.0	1408.0
①	3,000	4	6.1	37.0
②	5,000	4	3.7	19.0
③	7,000	4	2.6	11.0
④	7,000	2	1.5	8.0

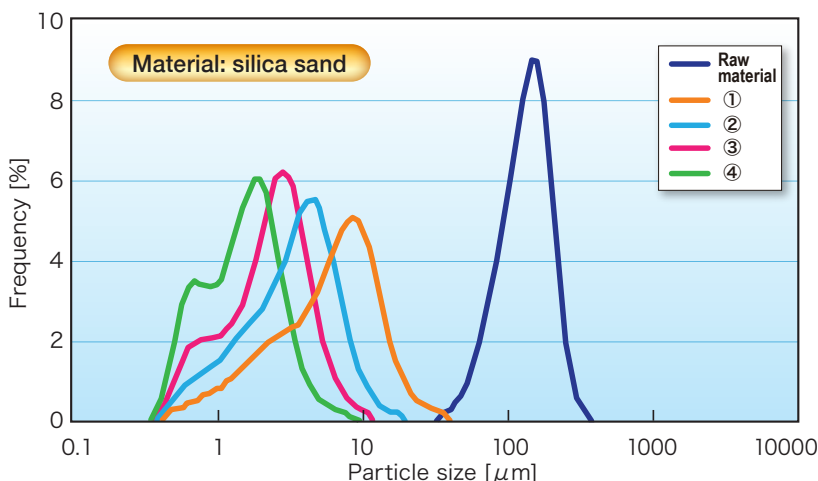


	Operating conditions		Particle size (μm)	
	Classifier rotation speed (rpm)	Air flow (m <sup>3</sup> /min)	d50	dMAX
Raw material	—	—	130.1	352.0
①	3,000	4	6.1	37.0
②	5,000	4	3.3	18.5
③	7,000	4	2.3	11.0
④	7,000	3	1.5	10.1



Unit diagram

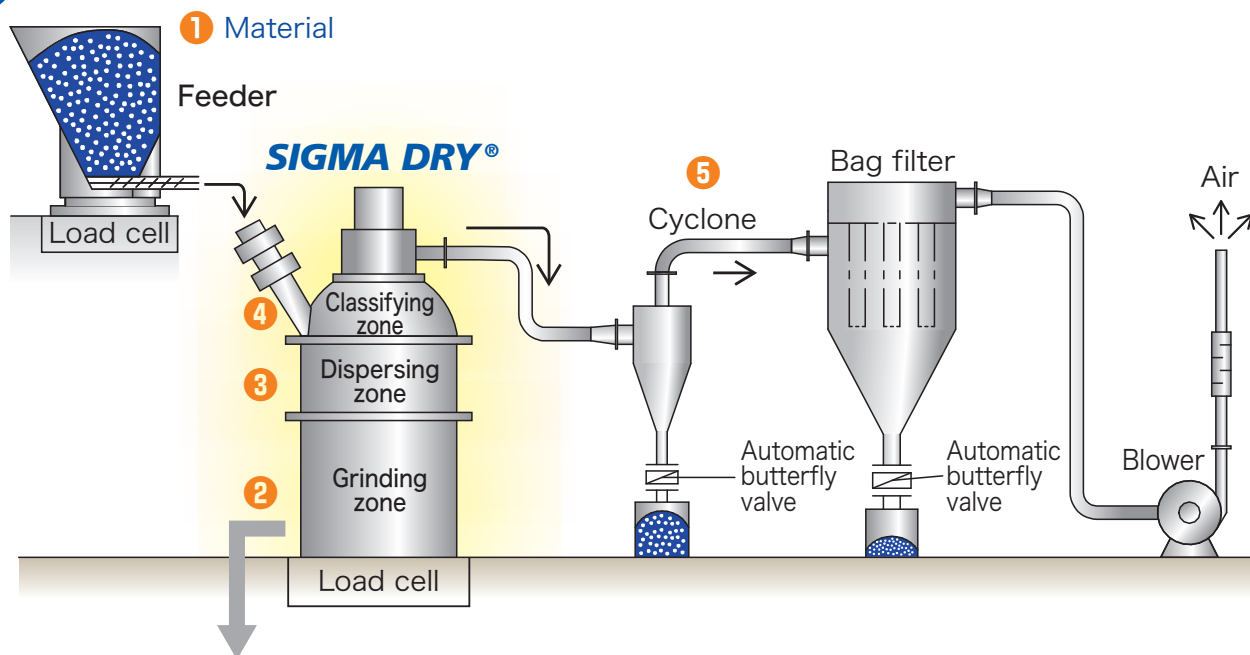

Detailed view

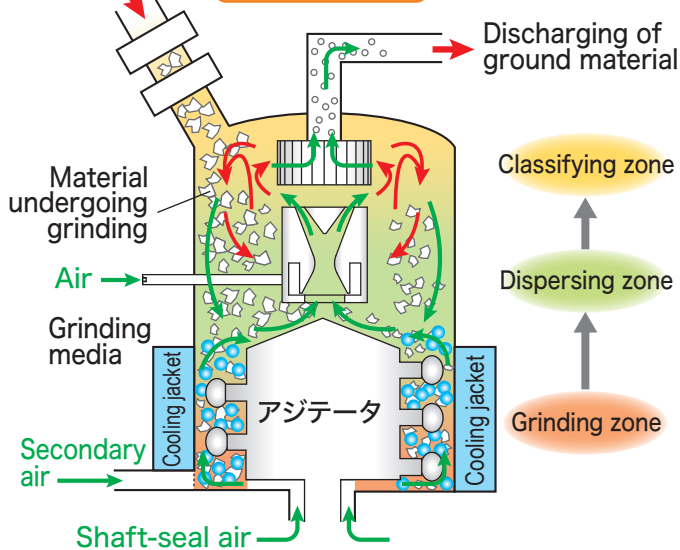

Process flow of SIGMA DRY® (model: SGD)

- 1 The raw materials are supplied into SIGMA DRY® through the constant feeder.
- 2 The coarse particles are sent to the grinding zone, and undergo grinding with beads.
- 3 The powder that has undergone grinding is loosened with air flow in the dispersing zone, and then is sent to the classifying zone.
- 4 In the classifying zone, the fine and coarse particles undergo classifying with the centrifuge rotor.
- 5 The fine particles are dispensed from SIGMA DRY® and are collected with the cyclone and bag filter.

Processing is continuously carried out by repeating steps 1, and 2 through 5.

Specifications

Model	SIGMA DRY®			
	SGD 12.5	SGD 25	SGD 50	SGD 125
Motor for grinding (kW)	7.5~	11~		
Motor for classifying (kW)	2.2~		5.5~	
Air flow used (m³/min)	2~4	4~8	8~20	20~50
Dimensions: W × D × H (mm)	800×1300×1900	1000×1600×2400	1300×2000×3000	1400×2300×3500
Capability ratio	1	2	4	10
Chamber material	Ceramics and metals (only metals in case of SGD125)			

\*The values are representative examples, and the specifications are subject to change without notice.

Applications

Battery materials (positive and negative electrode materials), electronic part materials, ferrites, various glasses, various ceramics (alumina, silicon nitride, etc.), carbon, cement, iron and steel slag, fly ash, abrasives, silica, inorganic substances, food, etc.

## Only table-sized model in industry!

For R&D purposes


## Mechanochemical is possible !

**Feature**

**Smallest size in industry**




- Achievement of submicron range with dry grinding
- Maximum particle size of 10 μm without need for classifier
- The 100 times capability of grinding compared to the ball mills
- Testing with minimum sample amount of 0.5 L
- Scaling up to production size

**Smallest amount in industry**

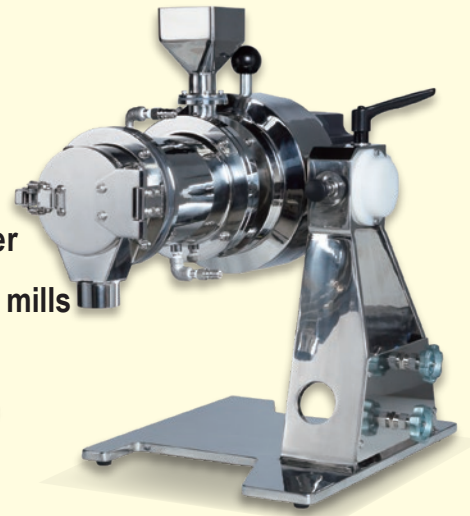

## Grinding data from **DRYSTAR<sup>®</sup> SDA1**

Material: Activated carbon

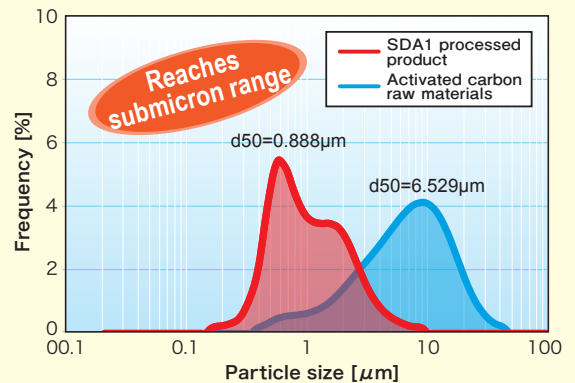

## Specifications

Model		DRYSTAR <sup>®</sup>							
		SDA1	SDA5	SDA12.5	SDA25	SDA50	SDA125	SDA250	SDA500
Grinding chamber volume (L)		1.0	3.8	12.2	25	50	125	250	500
Motor (kW)		3.5	5.5	15	22	45	75	132	200
Dimensions (W×D×H)	W(mm)	400	600	850	1100	1300	2000	2300	2600
	D(mm)	600	1300	2000	2500	3200	3500	4500	6000
	H(mm)	500	1400	1700	2800	3300	1100	1400	1700
Weight (kg)		50	550	800	1600	2700	5000	7500	12000
Chamber material		Ceramics and metals (only metals in case of SDA125 or larger)							
Combability with 1.5mm beads		○	○	○			—		

\*The values are representative examples, and the specifications are subject to change without notice.

## Comparison data 1 Differences between dry bead mill **DRYSTAR**<sup>®</sup> and various grinding machines


### Production efficiency comparison between dry bead mill **DRYSTAR**<sup>®</sup> and dry ball mills

#### Performance comparison between **DRYSTAR**<sup>®</sup> and ball mills

Model	<b>DRYSTAR</b> <sup>®</sup>	Vibrating ball mill	Rotating ball mill
Grinding performance	80	20	1
Particle size distribution	Sharp	Slightly broad	Broad
Achieved particle size	1 to several $\mu\text{m}$	Several $\mu\text{m}$	Several $\mu\text{m}$
Ball size	$\phi 1.5$ to 8 mm	$\phi 10$ to 20 mm, or Rods	$\phi 20$ to 50 mm
Scaling up	Easy	Difficult	Somewhat difficult
Noise	75 to 85 dB (A)	85 to 100 dB (A)	85 to 100 dB (A)
Vibration	Same as general machinery	Pollution problems at low frequencies	Somewhat large
Installation area	Small	Somewhat small	Large
Temperature control	Easy	Easy	Difficult
Product collection	Easy	Easy	Difficult
Wear	Agitator	Chamber	Chamber
Maintenance	Easy	Difficult	Major undertaking
Grinding method	Continuous pass	Continuous pass	Batch method

#### Example of facility comparison between **DRYSTAR**<sup>®</sup> and ball mill

In cases in which machines are geared for production, it is extremely difficult to manufacture the same product as the testing sample by using ball mills. In addition, even if it is viable to manufacture a product that is equivalent to the testing sample, compared to dry bead mill **DRYSTAR**<sup>®</sup>, the facility costs amount to roughly twice as much, three times more machines are required, the installation area expands by roughly seven times, and the number of beads needed increases by roughly 60-fold. Hence, the use of ball mills is inefficient and does not seem to be realistic.

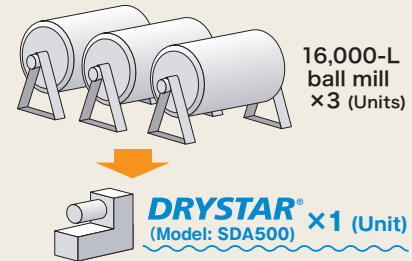


#### Comparison between dry bead mill and jet mill

Compared item	Grinding media	Grinding principle	Grinding configuration	Grinding force	Particle-size control	Energy costs	Additional equipment
<b>DRYSTAR</b> <sup>®</sup>	Beads ( $\phi 1.5$ to 8 mm)	Shear force and impact force of beads	Surface grinding	Strong	Easy... Bead diameter, rotating tip speed, and processing flow rate	One-tenth or less relative to jet mill	Small quantity needed
Jet mill	Air (Humidity control)	Impact of product itself	Bulk grinding	Weak	Difficult... Classifier and air pressure adjustment	Extremely large	Large quantity needed

## Comparison data 2 Difference between dry bead mill and wet bead mill

Dry bead mills can minimize contamination from beads compared to wet grinding. Therefore, dry grinding is effective as a pre-grinder for materials that require fine wet-process grinding to a submicron level or nano-scale level.

	Dry bead mill ( <b>DRYSTAR</b> <sup>®</sup> )	Wet bead mill
Bead size	$\phi 1.5$ to 8 mm	$\phi 0.015$ to 2 mm
Shaft sealing	Easy (Oil seal)	Precise (Mechanical seal)
Material wear	Low (one-tenth of wet grinding)	High
Re-agglomeration	Strong	Weak
Particle compounding	Good	Possible
Mechanochemical effect	Large	Extremely small

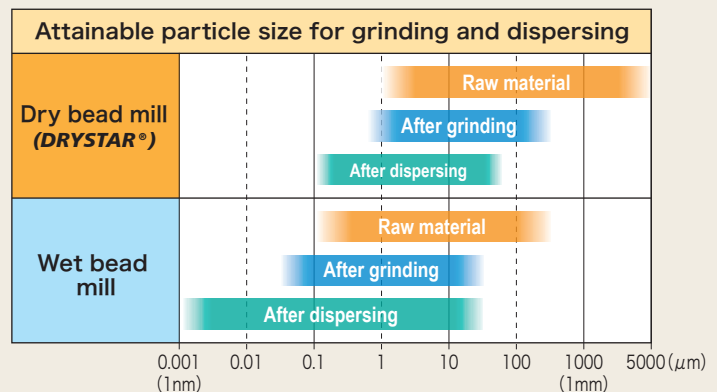

Particle technology for co-creation of new possibilities

**Ashizawa** Ashizawa Finetech Ltd.

Headquarters, factory, and laboratory 1-4-2 Akanehama, Narashino-shi, Chiba 275-8572 JAPAN TEL +81-47-453-8111 FAX +81-47-453-8378

Osaka Branch and laboratory 4-15-13 Katayamacho, Suita-shi, Osaka 564-0082 JAPAN TEL +81-6-6389-7700 FAX +81-6-6389-7710



For website

<https://www.ashizawa.com/english/> E-mail [sal@ashizawa.com](mailto:sal@ashizawa.com)